




LED Flood Light BS Series



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LPFL-10BS01	• 10W	850LM	N	117X107x31mm
LPFL-20BS01	• 20W	1650LM	N	117X107x31mm
LPFL-30BS01	• 30W	2450LM	N	156X144X33mm
LPFL-50BS01	• 50W	4100LM	N	199X160X36mm
LPFL-100BS01	• 100W	8100LM	N	331X280X50mm
LPFL-150BS01	• 150W	12100LM	N	331X280X62mm



LED Flood Light BS Series

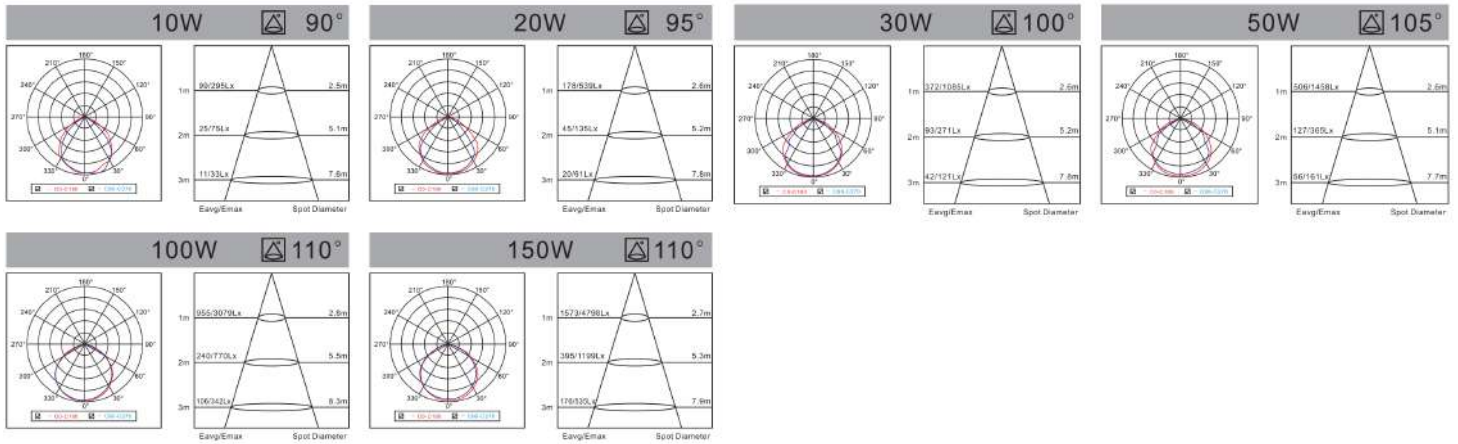

Product Overview

Energy efficiency class	A+
PF	0.5
CCT(K)	3000K/4000K/6500K
CRI(Ra)	>80
Voltage (V)	AC220-240
Frequency(Hz)	50/60
Beam Angle (deg)	90°/ 95°/ 105°/ 100°/ 105°/ 110°/ 110°
Lifespan (hrs)	20000/100000 Switching Cycles
Working Temperature (°C)	-45~50
Storage Temperature (°C)	-45~50



LED Flood Light BS Series




Physical data

Weight(g)	206 / 206 / 350 / 506 / 1725 / 1850
Designed for optimum use in non standard conditions	No
Fluorescent lamp replacement	No
Single packaging type	BOX
Single package dimensions (L x W x H)(mm)	125x40x100 / 1pcs 125x40x100 / 1pcs 160x37x130 / 1pcs 149x46x208 / 1pcs 365x95x335 / 1pcs 365x95x335 / 1pcs

* Do not use in close luminaire

Technical Drawings

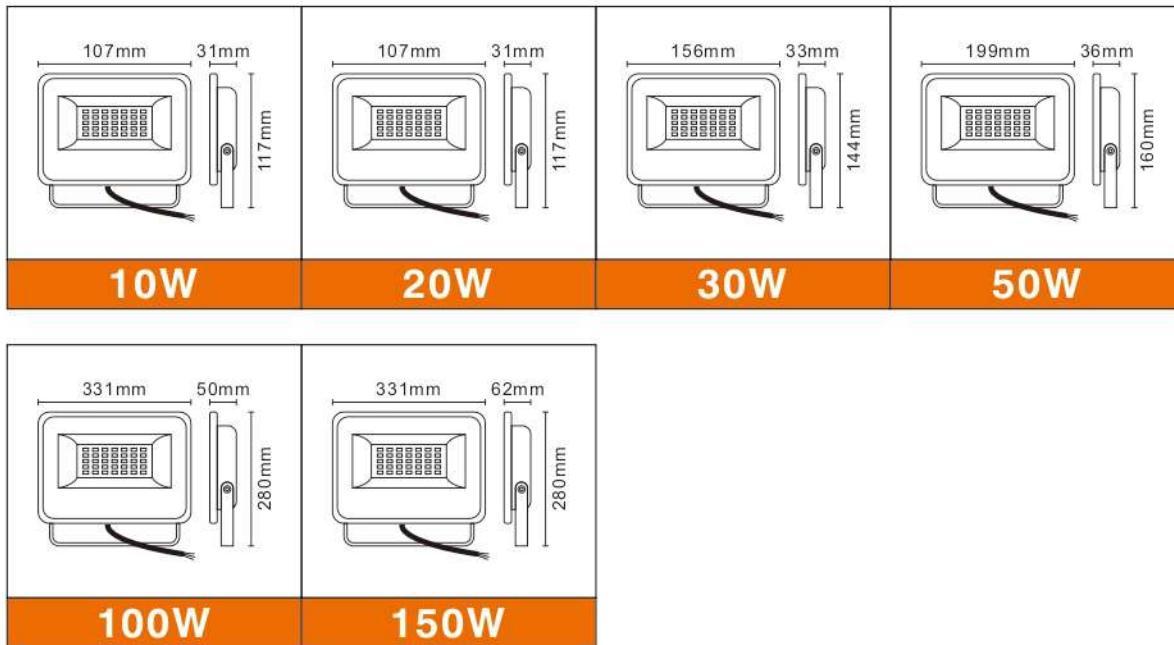




LED Flood Light BS Series



Energy Label



SMD breakdown drawing

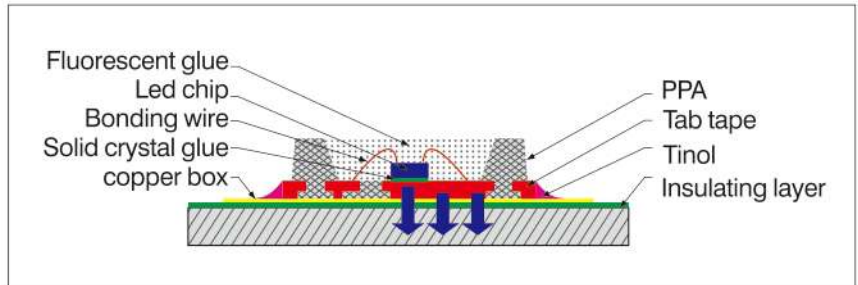

LED FLOOD LIGHT

NOTICE:
DO NOT SCREW IT OFF, OPEN IT OR PUT ANYTHING INSIDE THE HOLE

2X
Φ5x25mm

30mm

90°

ON

This manual applies to other LED Street light.